

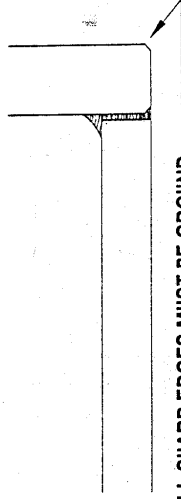


CONSTRUCTION DIAGRAMS  
February 1, 2001

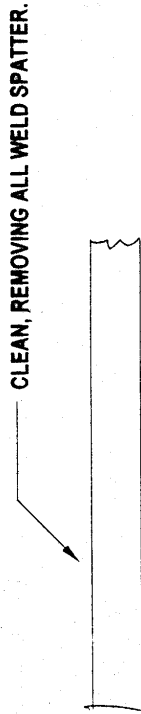

ALL SHARP EDGES MUST BE GROUND TO A MINIMUM 1/8" RADIUS.

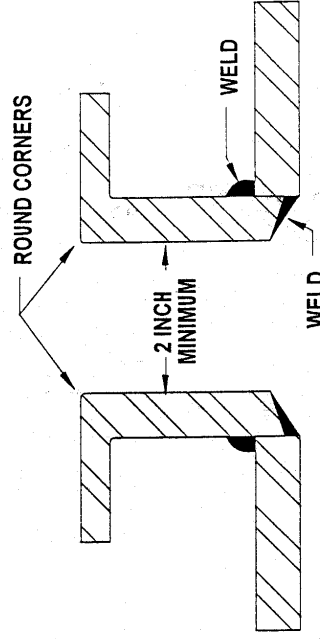

ALL OUTLETS MUST BE FLANGED OR PAD TYPE, RATHER THAN THREADED.

ALL JOINTS MUST BE CONTINUOUS SOLID WELDED, GROUND SMOOTH.

STEEL STRUCTURES DETAIL  
FOR PROPER LINING INSTALLATION

TLD-1001



1450 Hoff Industrial Drive  
O'Fallon, MO 63366  
636-379-9119 fax 636-379-0388  
www.blome.com e-mail info@blome.com