


CONSTRUCTION DIAGRAMS
February 1, 2001

POLYMER CONCRETE
MINIMUM 1" THICK

PRIMER

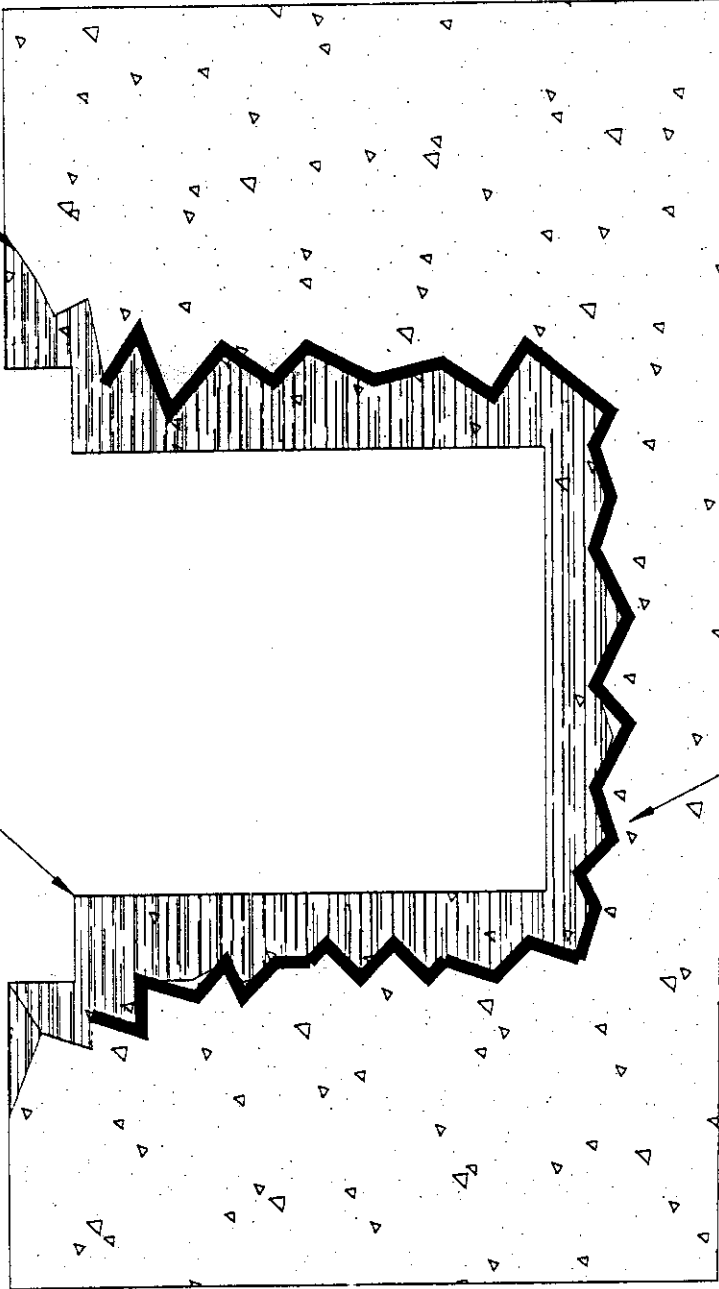

MEMBRANE

NOTE: MEMBRANE TO STOP 2" BELOW TOP
SURFACE OF CONCRETE FLOOR.
USE APPROPRIATE PRIMER FOR TOP 2".

POLYMER CONCRETE REPAIR OF TRENCH

CPD-1026

BLOME
INTERNATIONAL

1450 Hoff Industrial Drive
O'Fallon, MO 63366
636-379-9119 fax 636-379-0388
www.blome.com e-mail info@blome.com